




**CLOTAN
STEEL**

C-Tile roof sheeting



C-Tile steel tile roof sheeting

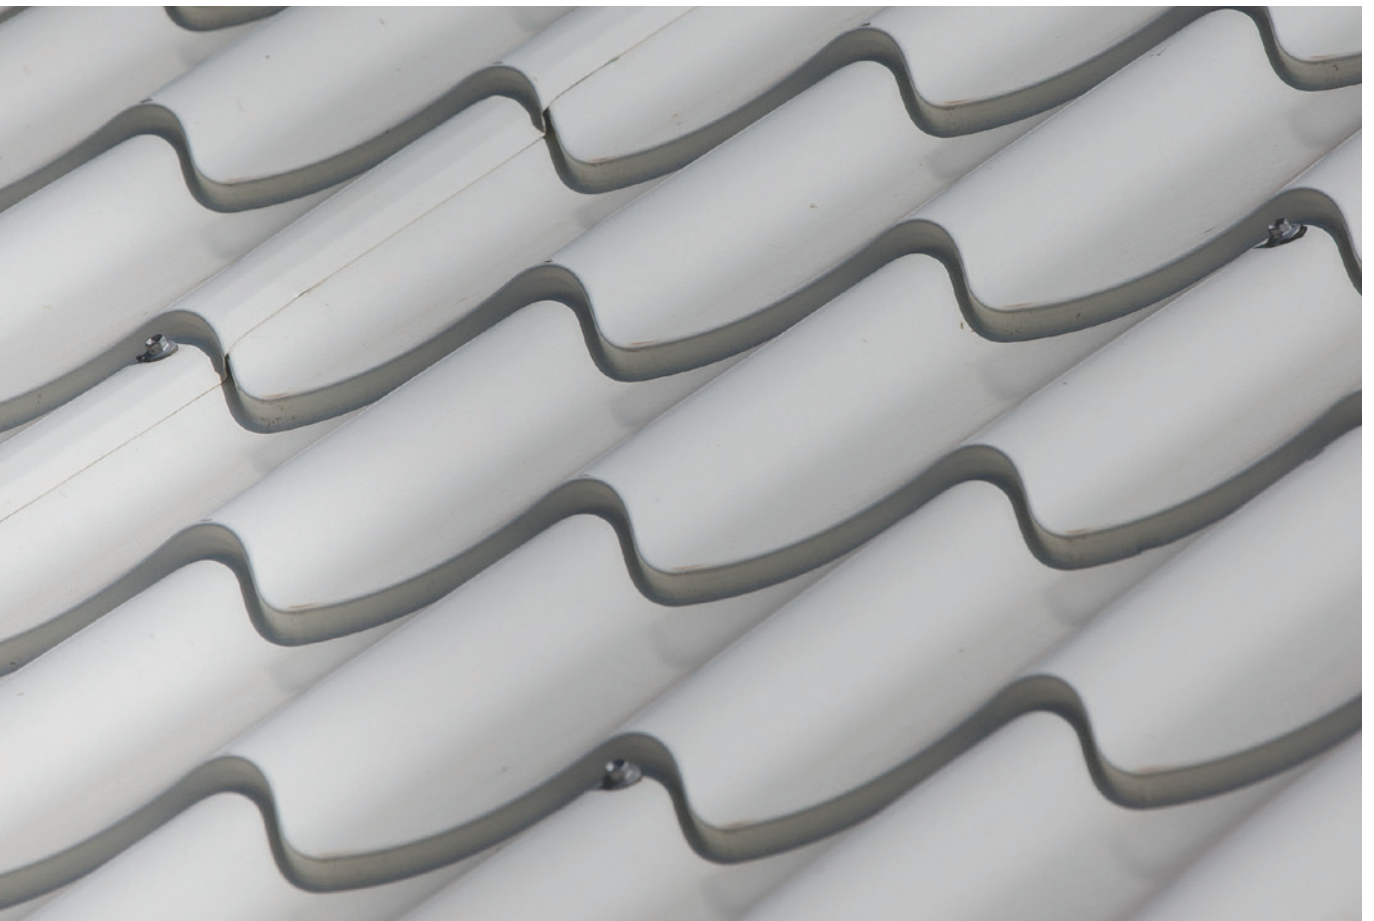

C-Tile

Steel tile roof sheeting

Structural guidelines

C-Tile steel roof sheets are available in a wide range of materials displaying various structural properties.

Available dimensions

C-Tile sheets are available in lengths up to 8 m on request.

Roof pitch

When using C-Tile, the recommended minimum pitch is 17°.

Installation procedure


The required number of C-Tile sheets can be calculated as follow:


Number of sheets = Length of building ÷ 1.040 m (Cover width of sheet)

Specification

Clotan Steel C-Tile steel roof sheeting and accessories with (Chromadek®/ ColorPlus®) finish on one side and protective primer coating on the reverse side fixed to (timber/steel) purlins or rails with a spacing. (Different pre-painted colour options available).

All sheeting is to be clearly marked on the reversed side at one-meter intervals, indicating thickness, material quality, coating thickness and paint system.

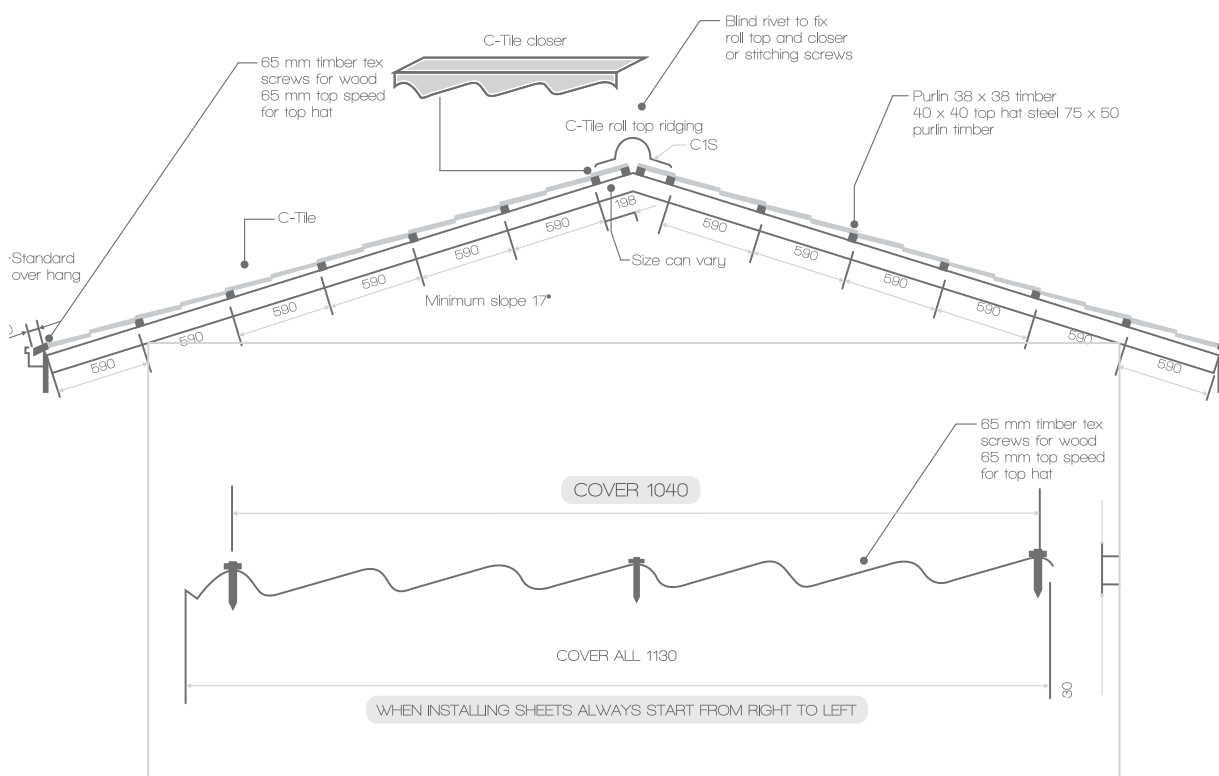

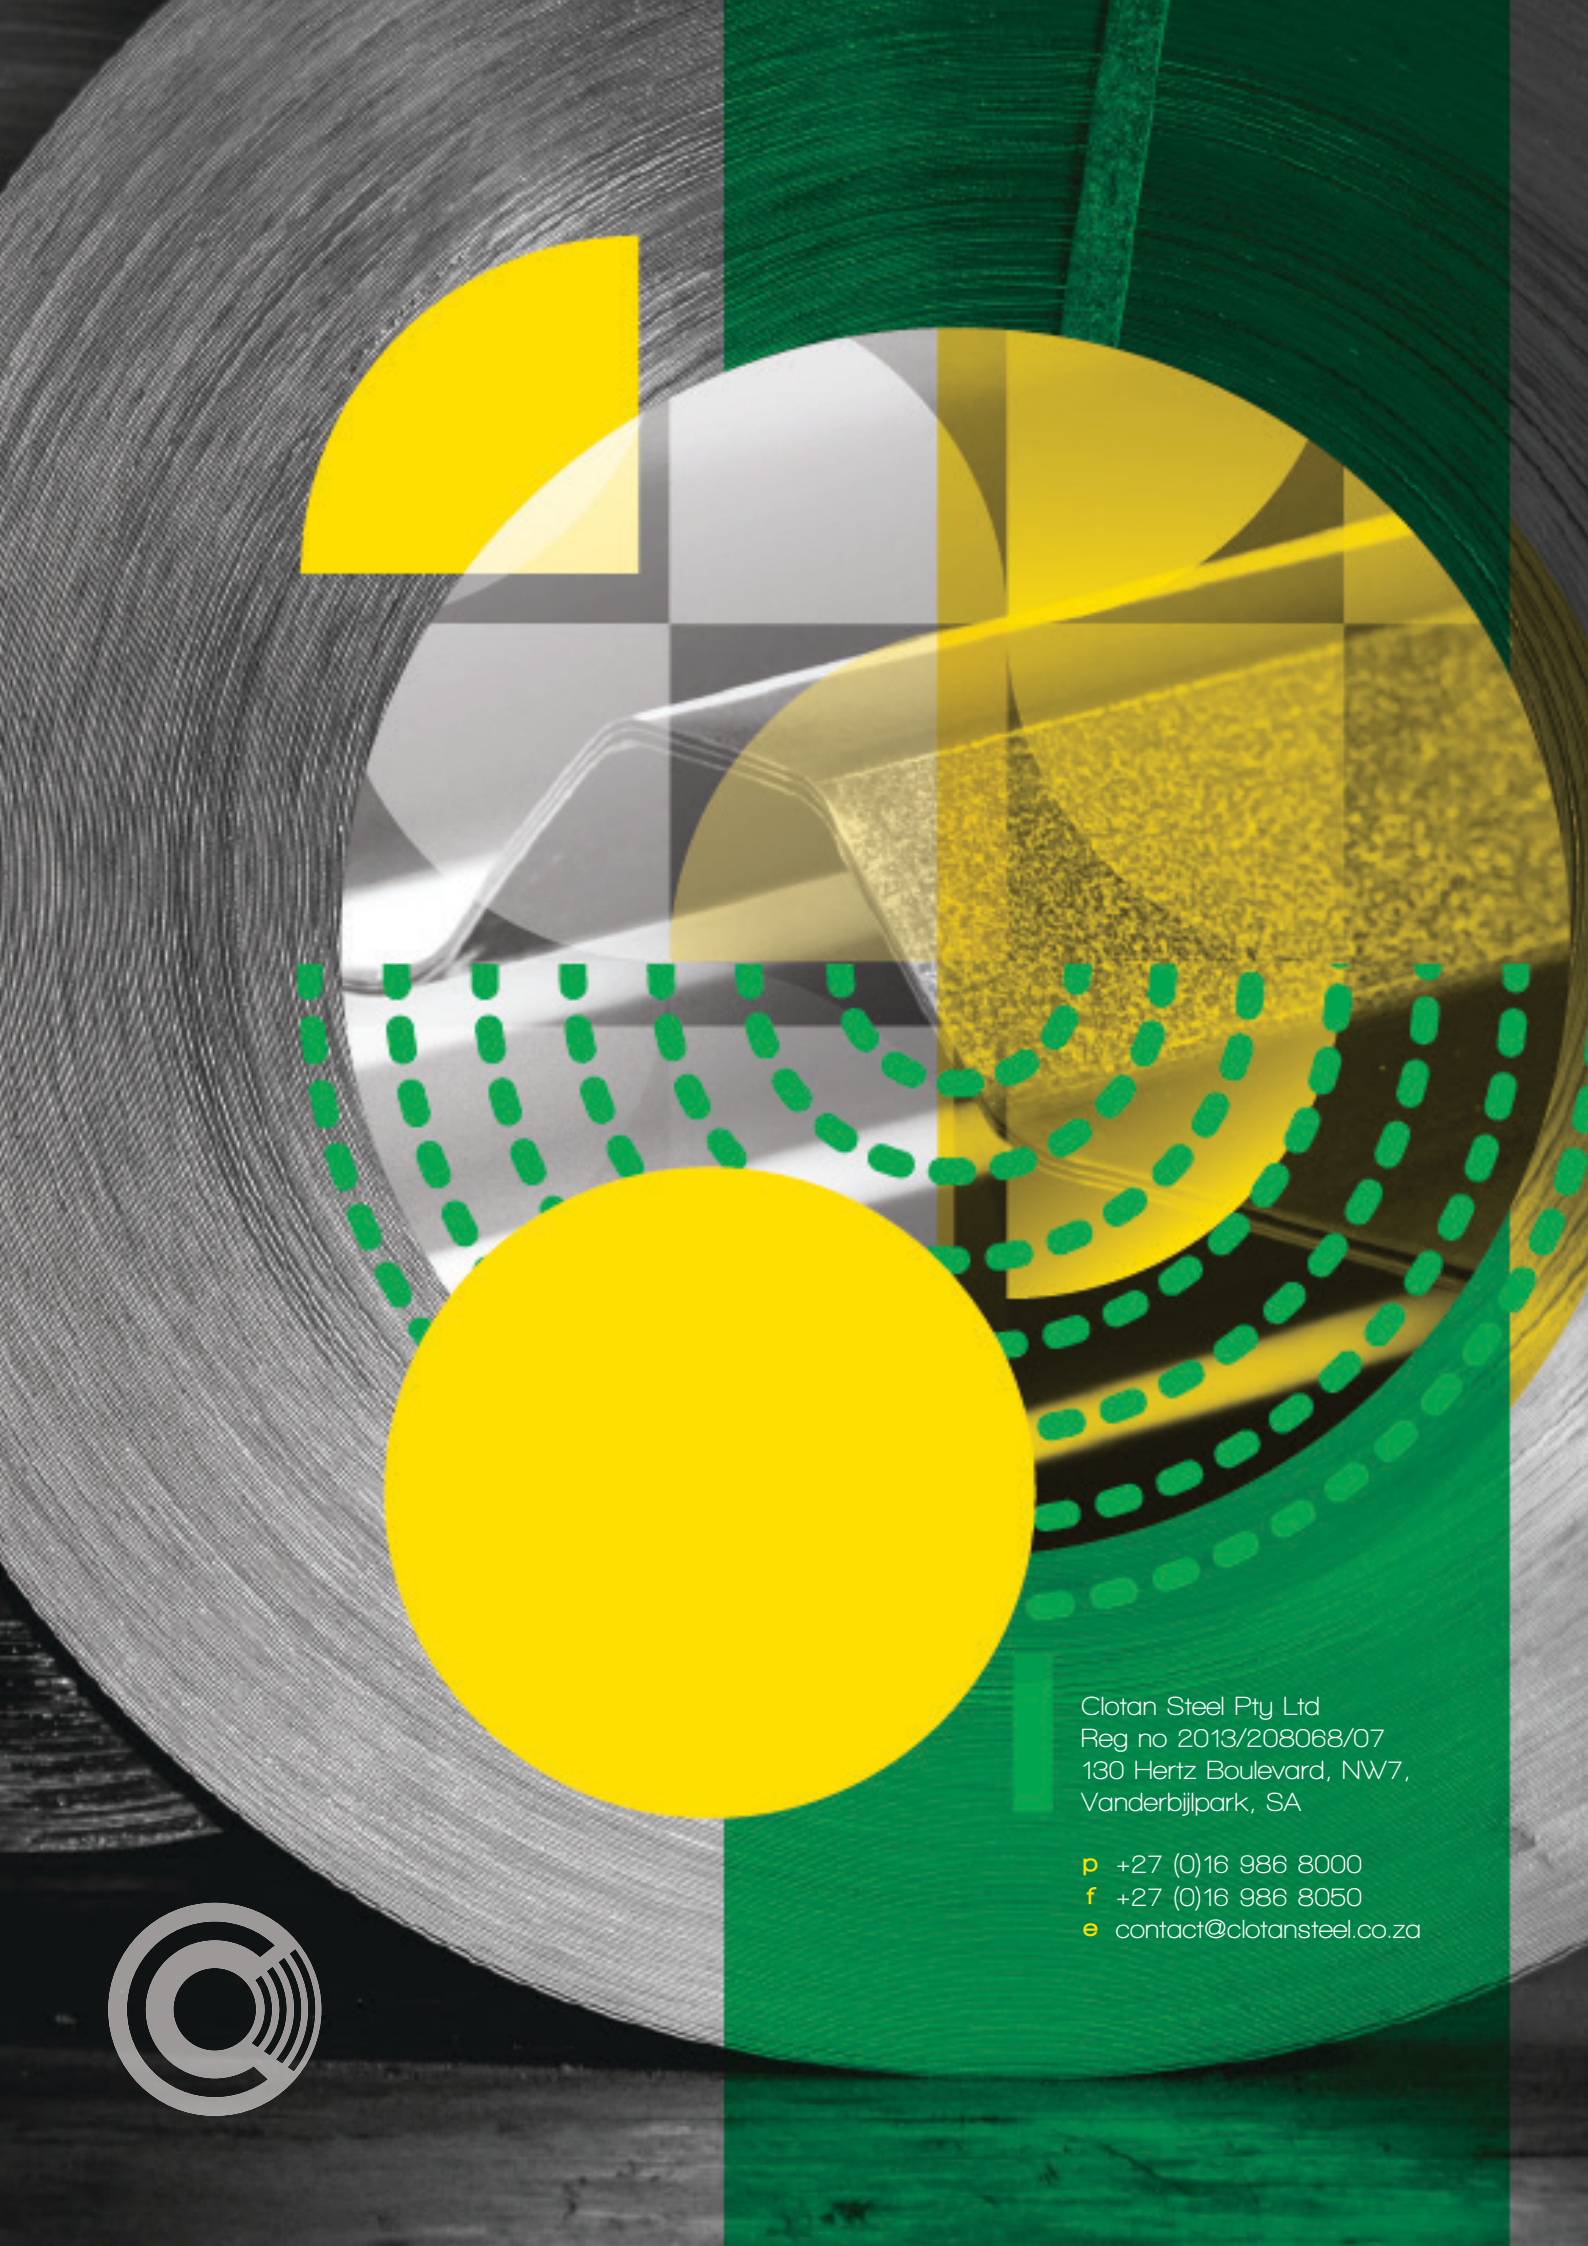

Clotan Steel Pty Ltd
Reg no 2013/208068/07
130 Hertz Boulevard, NW7,
Vanderbijlpark, SA

p +27 (0)16 986 8000
f +27 (0)16 986 8050
e contact@clotansteel.co.za

