



**CLOTAN
STEEL**

One of Lebanon

Flashings

Flashings




Flashings

Clotan Steel supplies a full range of flashings to customer requirements. These products are available in 0.40 mm, 0.50 mm, 0.58 mm and 0.8 mm Galvanised, 0.50 mm/0.55 mm, 1 mm and 1.2 mm Zinalume® and ZincAL® 0.53 mm and 0.55 mm Colorbond® and ColorPlus® 0.58 mm and 0.80 mm Chromadek®.

The standard range of flashings as summarised below is manufactured in 3 m lengths and up to 6 m maximum. Non-standard flashings are available on enquiry in different colours, lengths and dimensions.


1. Corner flashing

460g

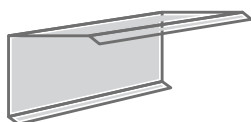


2. Internal corner flashing

460g



3. Gable flashing

460g

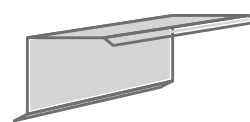

4. IBR ridging

460g



5. Roll top

460g




6. Valley flashing

460g




7. Sidewall flashing

305g

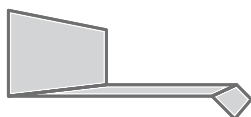


8. Headwall flashing

305g



9. Counter flashing

150g

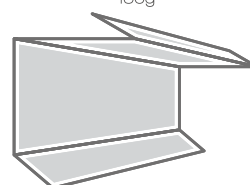

10. Broad flute closures




11. Narrow flute closures




12. Drip flashing


150g

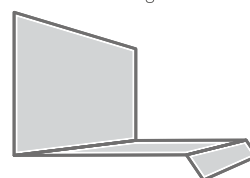

13. Drip flashing

150g

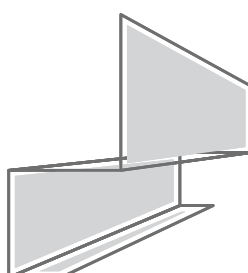

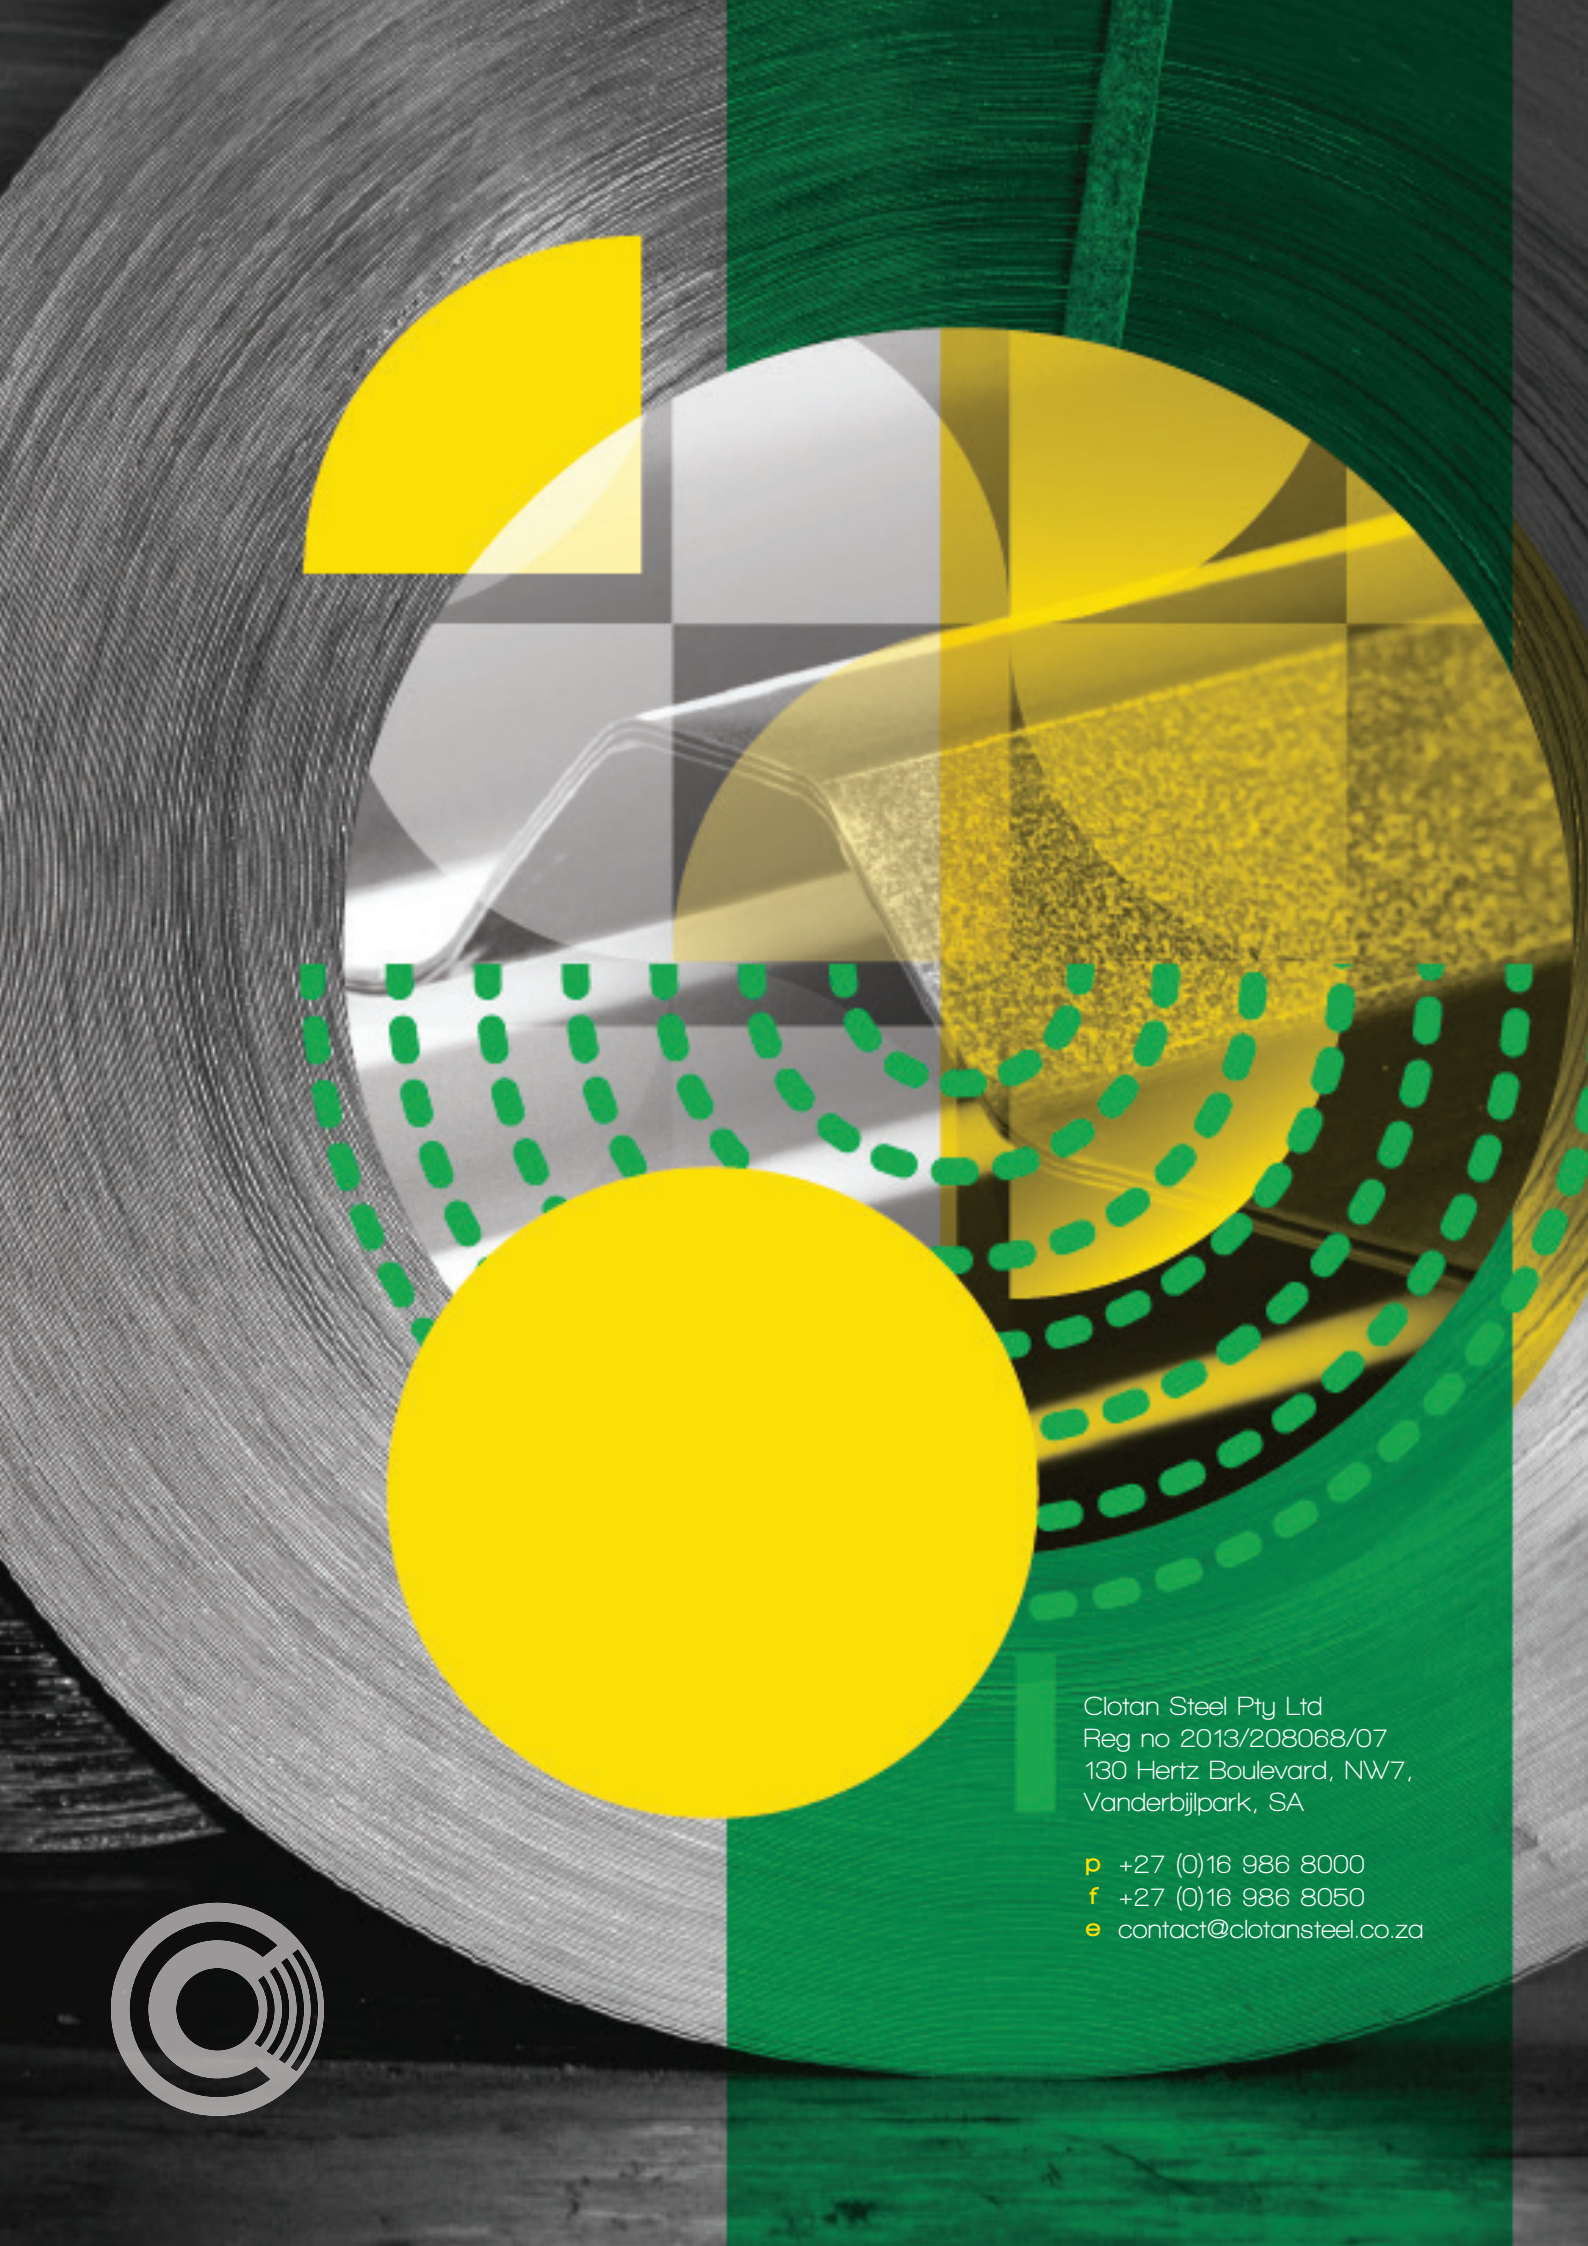

Clotan Steel Pty Ltd
Reg no 2013/208068/07
130 Hertz Boulevard, NW7,
Vanderbijlpark, SA

p +27 (0)16 986 8000
f +27 (0)16 986 8050
e contact@clotansteel.co.za

